

Instruction Manual

Low Profile Drum Caddy



Note: The Owner/Operator must read carefully and understand all the information presented here before operation.

THANK YOU FOR USING THIS LOW PROFILE DRUM CADDY . FOR YOUR SAFET AND CORRECT OPERATION, PLEASE CAREFULLY READ THIS INSTRUCTION BEFORE USING IT.

NOTE: All of the information reported herein is based on data available at the moment of printing. The factory reserves the right to modify its own products at any moment without notice and incurring in any sanction. So it is suggested to always verify possible updates.

1. SPECIFICATION

Model	DC500
Capacity	500 kg / 1100 lbs
Acceptable Drum Style	30 or 55 gallon
Overall Size	950 × 570 × 750 mm
Net Weight	17 kg
Wheel (poly) Dia*Width	150 × 50, 75 × 32 mm

2. NOTICE


- 2.1 Do not operate the drum caddy unless you are trained and authorized.
- 2.2 Please operate the drum caddy on the hard and flat surface, the grade must be less than 2°
- 2.3 Please push the drum when operating the drum caddy.
- 2.4 Do not operate this drum caddy more than 70m/min speed when overloading.

3. OPERATION

- 3.1 Put the handle on the drum and lift the drum by V block of the handle, then insert it under the base of the drum. Release the handle lightly, then the drum will stop insider the chassis for fitting the arc

3.2 Insert the pin of the handle into the key, then the handle will be falling-off because of the gravity. It can work when you pull it.

4. EXPLODED VIEW & PART LIST

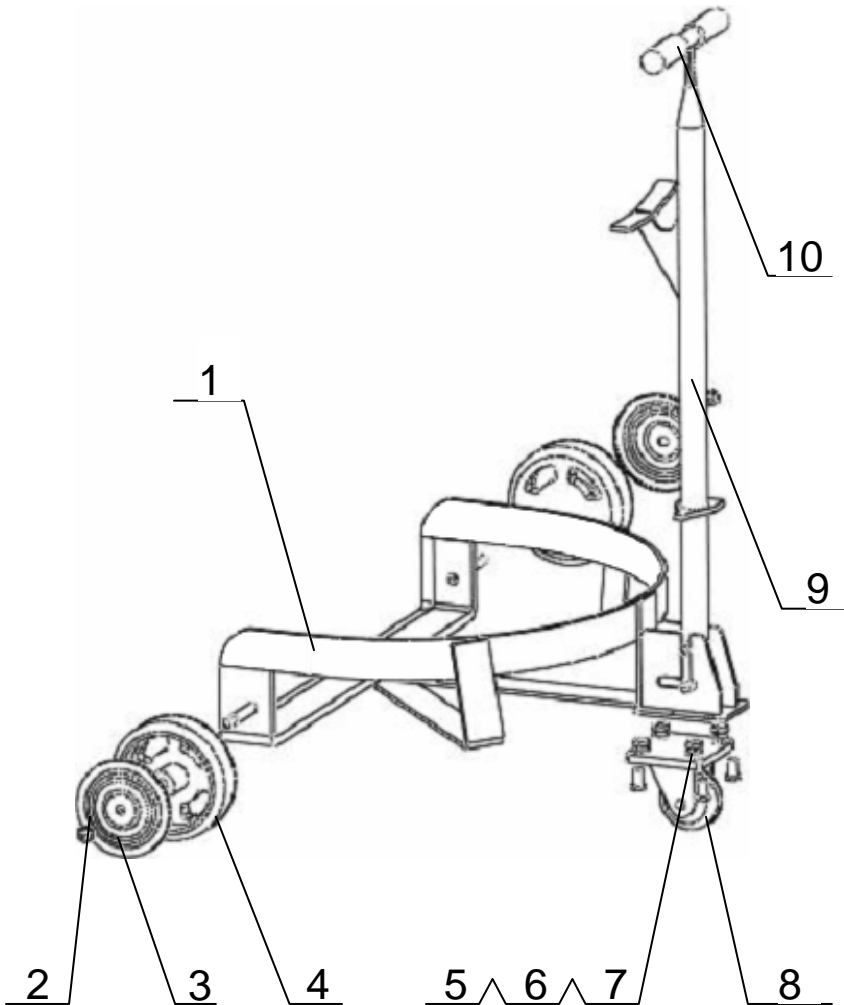

No.	Description	Qty	Remark
1.	Drum body	1	
2.	Locknut	2	M12
3.	Decked cover	2	
4.	Fixed wheel	2	150
5.	Locknut	4	M8
6.	Washer	4	8
7.	Bolt	4	M18 × 18
8.	Swivel wheel	1	
9.	Handspike	1	
10.	Handle sheath	2	